



PNEUMATIC WHEEL LIFTS

- Lift tire & wheel assemblies to a the vehicle or balancer with no strain
- Rollers allow tire rotation to get wheel lined up with studs
- Available models:
200 lbs: **Rotary MW200** (shown) or **Quality Stainless LM200**
300 lbs: **Quality Stainless LM350**
500 lbs: **Rotary MW500** or **Quality Stainless LM500** (shown)


3577 WHEEL DOLLY

- Use to remove & install single or dual truck wheel assemblies safely and easily
- 3/4 ton capacity
- Lift range: 2.5" - 10.25"
- Adjustable arms for different wheel combinations
- Safety chain to secure wheel for transport
- Shipping weight: 168 lbs



82302B HIGH LIFT WHEEL DOLLY

- Use to remove or install single or dual truck wheel assemblies safely and easily, even if vehicle is on a lift
- 1/2 ton capacity
- Lift range: 3" - 41.25"
- 7.5" side to side adjustment for precise wheel placement
- Lifting by a 5:1 geared manual winch, tilt alignment by hydraulic jack
- Safety chain to secure wheel for transport
- Made in USA

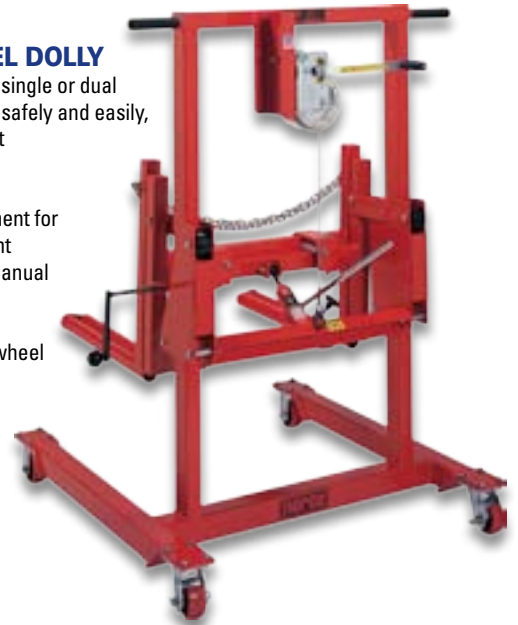

82999I 10 TON FRAME LIFT JACK

- Designed to lift the entire front end of a vehicle
- Lift range of 12.8" to 44.7"
- Listed capacity is @ 200 psi
- Air operation
- Shipping weight: 792 lbs



POWERTRAIN LIFTS

- Use to remove or install engines, transmissions or battery packs in vehicles on lifts
- 1250 lb capacity
- Saddle tilts front / rear and to the side
- Air / hydraulic operation
- **Norco 72675:**
Height range: 30" - 77"
Shipping weight - 480 lbs
Can be used with fuel tank saddle **72508**
- **OTC 1585A:**
Height range: 29.5" - 68.5"
Shipping weight - 303 lbs

